
B&D Contract Service ,Box 297 Gull Lake ,Sk. ,S0N 1A0 Ph. 306-672-7543 Building Inspection & Home Inspection

Service

Detached Garage Worksheet

Form# 2010-045

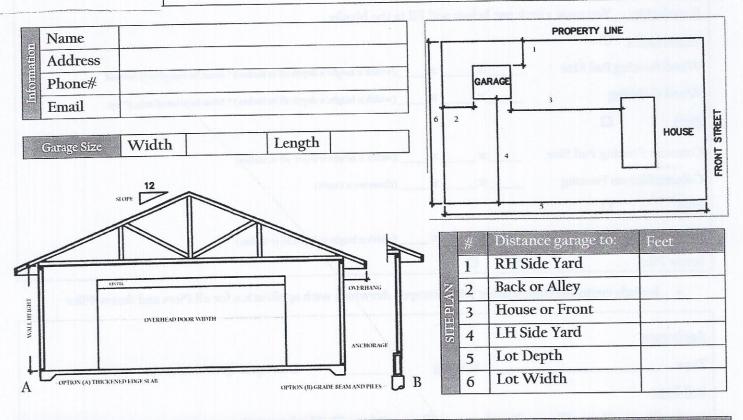

Area	Jtem .	Description (fill in below)
Roof	Roof Sheathing type and thickness:	
Roof	Spacing of roof trusses:	
Roof	Width of overhang:	
Roof	Type of roofing, e.g. Asphalt, metal,:	
Wall	Height of walls:	
Wall	Type of studs and spacing e.g. 2x4 @ 24" o/c:	
Wall	Type and thickness wall sheeting:	
Wall	Type of membrane e.g. tar paper, tyvec:	
Wall	Type of siding:	
Foundation	Type of wall anchors (min 1/2" @ 8' o/c):	
Foundation	Thickness of interior slab:	
Foundation	Type of sub base; e.g. Gravel, rushed rock:	
Foundation	Rebar in slab size and spacing e.g. 10mm @ 24":	
Foundation	Thickened Edge Slab thickness and width:	
Foundation	Rebar in Edge, size and rows:	
Foundation	Grade Beam Size (minimum 8" x 24"):	
Foundation	Pile size and spacing minimum 12" x12' @ 6'6":	
Door	Overhead doors note each, type and size:	Residence (Control of the Plants of the Control of
Door	Lintel above door type, size and plies:	
Door	Are the trusses supported on the lintel:	