B&D Contract Service ,Box 297 Gull Lake ,Sk. ,S0N 1A0 Ph. 306-672-7543 Building Inspection & Home Inspection Service


Shed Worksheet

Form# 2010-042

Information		
Name		
Address	to party and the	
Phone#		
Email	TO SUMMER THE TOTAL CONTROL OF THE PARTY OF	

Chal Ca		
117: 1 1	<u>。 </u>	
Width	Length	111111111111111111111111111111111111111

Shed Decking	g Spans		
Туре	Thickness	Skid Spacing	Cantilever
	/orientation	(in) on-center	(inches)
Ply or OSB	5/8"	16"	0"
Ply or OSB	3/4	24"	0"
2x4	On Flat	32"	0"
2x4-16" o/c	On Edge	72"	0"
2x6	On Flat	32"	12"
2x6-16" o/c	On Edge	9'4"	12"
2x8	Of Flat	48"	0"
2x8-16" o/c	On Edge	12'4"	16"
2x8-24" o/c	On Edge	10'9"	16"
2x10	On Flat	48"	0"
2x10 16" o/c	On Edge	14'6"	24"
2x10-24" o/c	On Edge	13'6"	24"

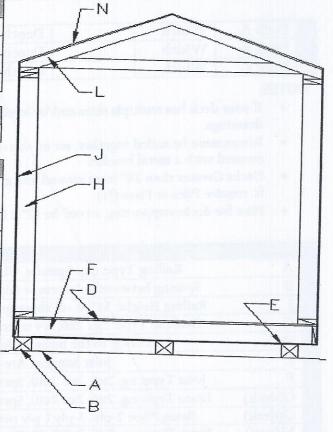

A	Details (see picture above): Fill in all blank sp Gravel Base sloped	
В	Type of skids e.g. 6x6, 4x4	Shed must have a sloped gravel base
C	Number of Treated Skids	
Note	All wood material that is not treated must be 6" from ground	
D	Plywood or decking type and thickness	non ground
E	Joist cantilever distance from edge of skids	
F	Joist Type: e.g. 2x6, 2x8 2x10, Spruce or Fir	
G	Joist Spacing: 16", 24"	
H	Wall Type: e.g. 2x4, prebuilt truss	
I	Stud or Truss spacing	
	Wall Sheathing type	
<	Size and plies: Lintels above openings	
	Roof rafter size if not trusses e g 2x4 2x6	
Vote	Rafters must be shaped, have a gusset plate at trequirements of NBC 9.23.13 "Roof and Ceiling	op and ceiling joist to hold the walls in. They must meet all
1	Type of Roofing material	Taiming
)	Type of membrane (tar paper) and siding	